



REPUBLIKA E SHQIPERISE
MINISTRIA E SHENDETESISE DHE MBROJTJES SOCIALE
DEJTORIA E SPITALIT RAJONAL FIER

MIRATOHET:
SPITALI RAJONAL FIER
DREJTORE
NEVILA SHUKE

Date: Qershor 2022

PREVENTIVI I PUNIMEVE

OBJEKTI:Rehabilitimi i ambienteve te Spitalit Rajonal Fier pas cmontimit te Angiografit .

Nr	Nr/an.	Emertimi i Punimeve	Njesia	Sasia	Cmimi	Vlera
A-PUNIME NDERTIMI						
PUNIME PRISHJE						
1	2.426/1	Prishje mur tulle me pastrim(HAPJE PORTE PER NXJERRJEN E ENGIOGRAFIT)	m ³	9.60		-
2	2.426/3	Prishje shtresa betoni	m ³	15.00		-
3	An	Heqje pllaka muri ne vertikaltet(nyjet sanitare) + Reanimacion	m ²	119.00		-
4	An	Heqje pllaka ne dysHEME	m ²	165.00		-
5	An	Prishje suvatim muri I brendshem	m ²	486.00		-
	An.	Skeleri per hapjen e murit te jashtem per daljen e angiografit	m ²	66.00		-
6	An	Prishje shtresa izoluese kati I dyre Angiografi	m ²	103.00		-
	An.	Heqje shtrese veshje plumbi per dhomen e angiografit	m ²	85.00		-
7	An	Transport dhe heqje te angiografit me pjete e pajisje te vecanta	cope	1.00		-
8	2.37/5b	Transport materiale ndertimi, dheu me auto deri 10.0 km	m ³	95.00		-
					SHUMA 1	-
PUNIME MURATURE						
1	2.86	Mur me tulle me vrima, t=12cm, h~3m, llaç perzier M15	m ³	3.80		-
2	An	Ndetim muri me knauf t=15cm me dy shtresa + lesh guri	m ³	12.20		-
3	An.	Ndetim muri me knauf t=10cm me dy shtresa + lesh guri	m ²	25.60		-
					SHUMA 2	-
PUNIME SHTRESASH+VESHJE						
1	An.	Shtrese betoni C 12/15 per nivelim	m ³	13.68		-
2	2.264	Shtrese lluster çimento 1:2	m ²	236.00		-
3	2.196/c	Hidroizolim ne nyje sanitare me dy shtresa mapei	m ²	48.00		-
5	An.	Shtrese me material Antibakterial Homogjen PVC	m ²	216.00		-
7	2.324/b	Plintuse grez importi, h = 10 cm	ml	243.20		-
8	2.326	Veshje me pllake majolike	m ²	66.00		-
9	2.273	Shtrese pllaka mermeri t = 20 mm parmaket e dritareve	m ²	3.80		-
					SHUMA 3	-
PUNIME SUVATIMI						
1	An	Suva brenda mur tulle h~4m me krah + skeleri te brendeshme (me 2 duar)	m ²	486.00		-
2	An.	Rikonstrukcion dhe zevendesim i pllakave te gipsit ne tavan + profile	m ²	103.00		-
3	An.	Veshje muri fasade suva + boje	m ²	145.00		-
4	An.	Patinim muri	m ²	486.00		-
5	An.	Grila ndarese +strukture per krevatet nga nj tj	cope	5.00		-
8	2.297/a	Tavan me kartonxhes	m ²	24.00		-
					SHUMA 4	-
PUNIME DYER DHE DRITARE						
1	2.375/a	Dritare d/alumini dyfish xham.	m ²	14.50		-
2	2.383/2	F V dyer te brendeshme druri importi cilesi e I-te.	m ²	14.00		-
3	2.395/a	Dere d/alumini pa xham,me mbushje d/a.	m ²	5.50		-
7	2.273	Shtrese pllaka mermeri t = 20 mm	m ²	6.20		-
					SHUMA 5	-
PUNIME BOJATISJE						
1	2.404/1	Boje hidroplastike importi cilesi e I-re	m ²	926.00		-
					SHUMA 6	-
PUNIME TE NDRYSHME						
4	An	Koloncina b/a me klase C20/25 perfshire armaturen ,dhe hekurin	ml	36.00		-
5	An	Breza dhe arkitrare b/a me klase C20/25 perfshire armaturen ,dhe hekurin	ml	21.00		-
					SHUMA 7	-
SHUMA -A(TOTALI PA TVSH (PUNIME NDERTIMI))(1+2+3+4+5+6+7+8)						-



B-SISTEMI HIDROSANITAR**RRJETI I UJIT TE PIJSHEM**

1	2.491/a	F.V.Tuba e rakorderi ujesjellesi PE d=20mm, t= 2.0 mm, PN 10	ml	54.00	-
2	2.491/b	F.V.Tuba e rakorderi ujesjellesi PE d=25mm, t= 2.0 mm, PN 10	ml	7.00	-
3	2.491/c	F.V.Tuba e rakorderi ujesjellesi PE d=32mm, t= 2.4 mm, PN 10	ml	9.80	-
6	An	F.V.Saracineske gize me flanaxha nderprerese per lidhjen e ujit dhe furnizimin	copë	1.00	-
7	An	F.V.Rakorderi per montim tubash	kompl	1.00	-
8	An	F.V.Rakorderi per mberthim tubash	kompl	1.00	-
9	An	F.V.Element mberthyes fiksues (upa,fasheta,gozhde)	kompl	1.00	-
AMBJENTI TEKNIK I FURNIZIMIT ME UJE					
10	2.492	F.V.,Tubo Zingato +rakorderi Ø 2 "	kg	7.88	-
12	2.492	F.V.,Tubo Zingato +rakorderi Ø 1 1/4"	kg	7.60	-
13	2.535/g	Termoizolim tubi Ø 2" me armofleks (d64x9)	ml	3.5	-
14	2.535/d	Termoizolim tubi Ø 1 1/4" me armofleks (d42x9)	ml	2.8	-
15	An	F.V.elemente mberthyes e fiksues	kompl	1.00	-
16	2.494/5	F.V.Valvol nderprerese DN 50 Ø 2"	cope	2.00	-
17	2.494/2	F.V.Valvol nderprerese DN 32 Ø 1 1/4"	cope	2.00	-
18	An	F.V.Valvol moskthimi DN 50 Ø 2"	cope	2.00	-
19	An	F.V.Valvol moskthimi DN 32Ø 1 1/4"	cope	2.00	-
20	An	F.V.Filter DN 50 ,DN32	cope	1.00	-
21	An	F.V.Xhunto Antivibruese DN 50 Ø 2"	cope	2.00	-
22	An	F.V.Xhunto Antivibruese DN 32 Ø 1 1/4 "	cope	3.00	-
23	An	F.V.manometer analog	cope	1.00	-
24	An	F.V.termometer analog	cope	1.00	-
25	An	F.V.Termometer I zhytur /sensor temperature	cope	1.00	-
26	An	F.V.Grupi I furnizimit me uje	kopml	1.00	-
27	An.	F.V.Elemente plotesues per instalimet e linjave hidraulike (niple,manikota,fije lini,pasta)	kompl	1.00	-
				SHUMA 1	-

RRJETI I UJERAVE TE ZEZA

1	An.	F.V.WC allafrenga inkaso + Aksesore ndihmes per pacientet	cope	3.00	-
2	An.	Depozite inkaso 8 cm trashesi Valsirr + aksesor montimi	cope	3.00	-
3	An.	Bide importi inkaso + aksesore	cope	3.00	-
4	An - 15	F.V bolier 80 liter, uje te ngrohte	cope	3.00	-
5	2.515	F.V.pilete dysHEMEJE Ø 50 mm	cope	3.00	-
6	2.519	Tub kanalizimi pvc Ø 90 mm	ml	26.00	-
7	2.520	Tub kanalizimi pvc Ø 110 mm	ml	16.00	-
8	An	Tub kanalizimi pvc Ø 50 mm	ml	32.00	-
9	An.	Lavaman me mishelator + mobiljeper ne reanimacion	cope	4.00	-
10	2.495	F.V.lavaman porcelani importi me mishelator	cope	3.00	-
11	An	Tapa pastrimi Ø 110 mm	cope	3.00	-
12	An.	F.V.Elemente ndihmes +rakorderi (reduksion,brage,bryrla)	kompl	1.00	-
				SHUMA 2	-

SHUMA -B(TOTALI PA TVSH (PUNIME HIDROSANITARE))**C-SISTEMI MNZ**

1	2.494/2	F.V.saracineska bronzi 1" =25mm	cope	2.00	-
2	An	Elektroda saldimi	kg	5.00	-
3	An	F.V. Buton alarmi	cope	4.00	-
4	An	F.V.Tabela drejtim dalje	cope	4.00	-
5	An	F.V.Tabela hidranti	cope	2.00	-
6	An	F.V.Tabela zbritje shkallësh	cope	2.00	-
7	An	F.V.Tabela buton alarmi	cope	4.00	-
8		Instalimi I rrjetit te sensoreve te detektimit te tymrave + paneli I kontrollit	kompet	1.00	-
9	An	F.V.Tabela fikse zjarri me pluhur	cope	2.00	-
10	An	F.V.Tabele fikse zjarri me CO2	cope	2.00	-
11	An.	F.V.Elemente plotesues per instalimet e oksigjenit ,ajrimet permiresim i rrjetit ekistues	komplet	1.00	-
12	An.	F.V.Elemente plotesues per instalimet e linjave hidraulike(niple,manikota,hollandez,fije lini,etj)	kompl	1.00	-
				SHUMA 1	-

SHUMA C(TOTALI PA TVSH (PUNIMEMNZ))**E-PUNIME ELEKTRIKE**

1	480	F.V tub plastmasi Ø 18 ~ 21 mm	ml	330.00	-
2	480/3	F.V tub plastmasi Ø 22 ~ 26 mm	ml	540.00	-



3	2.481/1	F.V percjelles PV-500 Ø 1.5 mm2	ml	800.00		-
4	2.481/2	F.V percjelles PV-500 Ø 2.5 mm2	ml	1,230.00		-
5	2.481/3	F.V percjelles PV-500 Ø 4 mm2	ml	150.00		-
6	2.481/4	F.V percjelles PV-500 Ø 6 mm2	ml	90.00		-
7	2.487/c	F.V kuti suport pllaket 3 modular Gevis	cope	38.00		-
8	2.487/d	F.V kuti suport pllaket 4 modular Gevis	cope	35.00		-
9	2.485/b	F.V priza bivalente 220V 10A 2P-T Gevis	cope	20.00		-
10	2.485/d	F.V priza shuko "Gevis" universal	cope	82.00		-
11	2.485/f	F.V priza shuko jashte murit 2P+T IP=54 "Gevis"	cope	20.00		-
12	2.485/2	F.V Çeles 1 polar 220V 10A "Gevis"	cope	38.00		-
13	2.490/f	F.V Kasete plastike KE me 36 modular (vende)	cope	2.00		-
14	2.490/1	F.V Automat termo/el.manj. diferencial 2P 220V, 32A, dl=0.03A	cope	2.00		-
15	2.490/1a	F.V Automat termo/el.manj. diferencial 2P 220V, 10A	cope	11.00		-
16	2.490/1b	F.V Automat termo/el.manj. diferencial 2P 220V, 16A	cope	5.00		-
17	2. a-120	Llampe sinjalizimi 220V;1.2w	cope	2.00		-
18	2. a-121	Kanaline metalike 150x50	cope	50.00		-
19	2.487	Kuti derivacioni PT-5	cope	8.00		-
20	2.487	Kuti derivacioni PT-7	cope	4.00		-
21	2.a-73	Elektroda tokezimi, profil zingato e bakerizuar , L=1.5m	cope	3.00		-
22	2.a-98	Percjelles shirit zinku tokezimi, Zn= 30x3mm	cope	15.00		-
23	2.A-96	Percjelles Tokezimi , Cu, S=16mm2, i zhveshur	cope	40.00		-
24	2.490/1c	F.V Automat termo/el.manj. diferencial 2P 220V, 32A	cope	1.00		-
25	2.483	Prize data RJ45	cope	12.00		-
26	2. a-137	Ndricues fluoreshent 4x18w,IP40	cope	12.00		-
					SHUMA 1	

SHUMA E (TOTALI PA TVSH (PUNIME ELEKTRIKE))

Sistemi i internetit

1	An	F.V Kabell rrjeti FTP Cat 6	ml	120		
2	An	F.V Switch 8P 10/100 Mbps, PoE	cope	1		
3	An	keyboard kontrolli+modem	cope	1		

Shuma 7

SHUMA (TOTALI PA TVSH (PUNIME NDERTIMI))						-
SHUMA (TOTALI PA TVSH (PUNIME HIDROSANITARE))						-
SHUMA (TOTALI PA TVSH (PUNIME MNZ))						-
SHUMA (TOTALI PA TVSH (PUNIME ELEKTRIKE))						-

SHUMA TOTALE E PUNIMEVE PA TVSH						-
FONDI REZERVE 5%						-
SHUMA PA TVSH						-
TVSH						-
SHUMA ME TVSH						-

PREVENTIV PAJISJESH


Nr	Nr/an.	Emertimi i Punimeve	Njesia	Sasia	Cmimi	Vlera
B-SISTEMI HIDROSANITAR						
PAJISJE RRJETI I UJIT TE PIJSHEM						
1	An	Pompe zhytесе 3 fazore , tipi 4SR8/31 ,5.5 kW H=200 m ,Q 40L , H=27 ml q=200 l	kompl	1.00		-
2	An.	Panel shoqerues 5.5 KW (perfshire Rele)	cope	1.00		-
3	An.	Kabell elektrik specifik per montimin e pompes	ml	46.00		-
SHUMA -B((PAJISJE))						

C-SISTEMI MNZ

PAJISJE SISTEMI MNZ						
1	An	F.V Fikse zjarr me pluhur, destinacioni per mbrojtjen e paisjeve elektrike ne ndertes. Tip bombel (e levizshem). Klasa e zjarrit 55A-233BC, kapaciteti normal 6 kg, pesha 17.6 kg. Diametri 190mm, lartesia 640 mm.	cope	2.00		-
2	An	F.V Fikse zjarr me Co2, destinacioni per mbrojtjen e paisjeve elektrike ne ndertes. Tip bombel (e levizshem). Klasa e zjarrit 55A-233BC, kapaciteti normal 6 kg, pesha 17.6 kg. Diametri 190mm, lartesia 640 mm.	cope	2.00		-
SHUMA -C((PAJISJE))						

F-SISTEMI MEKANIKE

PAJISJE SISTEMI MEKANIKE						
1	An	Kondicioner tip inverter 12 btu	cope	6.00		-
SHUMA -F((PAJISJE))						

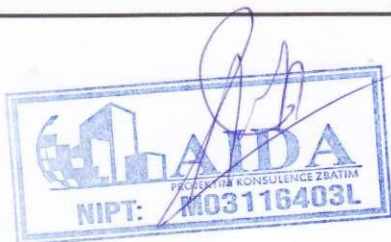

SHUMA -B+C+F((PAJISJE))

PREVENTIV PERMBLEDHES
PUNIME NDERTIMI

A	PUNIME NDERTIMI	-
B	PUNIME HIDROSANITARE	-
C	PUNIME MNZ	-
D	PUNIME ELEKTRIKE	-
E	PUNIME PER LINJEN E INTERNETIT	-
A+B+C+D+E+F	PUNIME NDERTIMI PA TVSH	-
	FONDI REZERVE 5%	-
	TOTALI PA TVSH	-
	TVSH 20%	-
I	PUNIME NDERTIMI ME TVSH	-
<u>PAJISJE PER PUNIMET E NDERTIMIT</u>		
B	PAJISJE HIDROSANITARE	-
C	PAJISJE MNZ	-
F	PAJISJE MEKANIKE	-
2	SHUMA PAJISJE ME TVSH	-
I+2+3+4	TOTALI ME TVSH	-

Pergatiti:
Ing. Andon Kristo

